(51) to CL?: B65D 1/00

- (22) Date of Gling: 16.03.1998


- 🛦

- (84) Designated Contracting States: AT BE CH DE DK ES FI FR GB IE LI NL SE
- (30) Priority: 19.03.1997 GB 9705657
- (62) Document number(s) of the earlier application(s) in accordance with Art. 78 EPC: 98909635.9 / 0 969 891
- (71) Applicant: Clinical Design Solutions Limited Watertooville, Hampshire PO7 7th (GB)
- (72) Inventor: Bacon, Raymond John, Dr. Emsworth, Hampshire P010 80T (GB)
- (74) Re entative: Brooks, Nigel Samuel et al

Remarks:
This application was filed on 06 - 08 - 2002 as a divisional application to the application mentioned under (NID code 62.

## (54) Aerosol dispensing device

(57) An excread dispersion which comprises of a soly including a mouthpless for inhalaction of a substance. The substance is exceed in a contrainer, which has a depressable coultet, in a presented gaseous or begul form. The could their release the dose when depressed towards the container. The depression acts on a depressable towards the container. The depression acts on a depressable of the stripp this is natistate to parameter to public the stripp the dispension is cockad; when it is compressable of the stripp de dispension is cockad; when it is compressed for cocking them is concluded to the container than the charter. There is an opening into the charter-thank is controlled by a breath sactuable valve. This compress is valve lettle, a valve custed that is connected to the port, these are connected by a flexible faller within cash be in two positions in the dosed position in the observable on the observable within cash be in two positions in the dosed position. connected to the port, these are connected by a flactive but which can be in the postborn in the clease position is a binde and in the open position it is un-shinked. There is a movable member terrowalty mounted in the body, that is connected to the valve lists, which moves the bale to control the striking of the bale. When the morni-bit mornibule is in its rest position the table is listed and when the movable member is in its rest position the table is listed and when the movable member is in the rest position the table is listed and when the movable member is moved invested to the oritize on infantice of the allowed in the control of the co



Personal by Jopes, 79001 PARIS (FR)

## EP 1 298 065 A2

[0015] Alternatively the movable portion of the tube can be a middle portion of the tube, between and por-tions connected to or providing the inlet and the outlet

con us include potent in the table, between their per-tition connected to or providing the little and the outlet of the valve.

[Unit] What the dispersant may find use for cootin-uous dispersing, normally they will be used for dispers-ing material chase. These may be released by the source of gas of flegal on measured doese. However it is enricinged that the source may be arranged to release for the present that the source may be arranged to release to the present that the source may be arranged to release to the present that the source may be arranged to release to the present that the source may be arranged to release to the present that the source may be arranged to release to the present that the source may be a source of the local translation of the source may be a source of the local translation of the source may be a source of the local translation of the source may be a source of the local translation of the source may be a source of the source of the local translation of the source o

Figure 5 is a cross-sectional view of a dispenser ac-cording to the invention.

Figure 5 is a cross-sectional view of a dispenser according to the Invention.

[0018] Tumig to Figure 5, the dispenser 201 there-shown includes an aerosol medicureant container 202 in a body 200. The aerosol outlet tube 205 is received in a body 200. The aerosol outlet tube 205 is received in a sched 206 in body 30 modern 201 in the Body 200 of the body. A mouttpieze 211 is provided adjacent the block 207 in the optoble 201 in the block 207 in the optoble 201 in the block 207 in the optoble and of the container Is received in a short deverybation 204, which is arranged as plation in a excord development 2041. The block 207 is provided in a photo the accord development 2041 in the block 207 in the provided for urging the plation invention. The plation is modated with an integral by 2044, which about on its modated with an integral by 2044, which about on the extend of the spring 5042. Thus whilat the cylinder remained doses, the cooking of the dispenses by pushing of the Inoid 2043 upwards, the plation 204 is pneumatically held in position until released, whereapon the action of the spring forces the contrainer down causing movement of the outlet bus invented of the container for depositing of the serviced medicament. [2019] Providery mountain on the end 2045 of the cylinder 2041, in a flee 2115, which is urged to its position alphot pic 2231. A tube 211 with brinks 213,1214 is achieved to me and time on opening 212 in the cylinder and 2045. The other and of the tube is clipped 2151 to the plation and 2045. The other and of the body 203 has an air into opening 201.

position. The top of the body 203 has an air inter opening 211 and an air passage 221 is provided to connect the mouthplace to the space333 on the side of the filep 215 opposition from the Intel<sup>®</sup> 210 (2021). On cocking of the depenser as described above, the lath value 224 prevents air from entaining the cylindex, despite the action of the spring 2042. On Intellution through the montpleces, a pressure differential is 1500 of the 1500 from the control of the spring 2042. On Intellution through the montpleces, a pressure differential is 1500 of the 1500 from the control of the spring 2042.

developed across the flap 21, phroting it down against to spring 223. This movement unkinks the tube 211 sufficiently for six to pass through it which allows the spring 2040 to excluse depensing from the container. [2022] The invention is not intended to be restricted to the debtals of the above described embodements. The disposaer may be a dry powder disposaer other harding means for disposaering a pre-methered does of powder or metering a dose of powder, either of which is fluided for inhalation by a dose of gas released by a link valve operated by a platon or other varie in the namero of the described embodements. It should also be specifically noted that the invention can be used in insail irradiation devices a qualit as a morbin histation devices. Again that on be envisinged that a mostriplice cap or a separate of pan has photoed onto the end of the canisters to hold it depressed immediately prior to inhalation.

the dispenser acrosol medicament contain the dispensar aerosol medicamen body short steave/piston second steave/cylin spring slide knob integral lip and

mouthplece torsion spring pivot pin tink valve air iniot openis air passage

3

A dispensor for a gaseous, gas borne or droplet substance, the dispenser comprising:

a body (203)including a mouthplace (219) with an inhalation/insuffation orifice (20) at its distall

related by pneumatic force. The pneumatic force is re-lessed by a break actuated valve.

[0007] In the prior and is US Patent No. 9, 187,748, em-titled "heliation actuated aerosol device". This employs a breath actuated varse for controlling valves for relates of pressurated medicaments from a container to an opening at a morphisce. The valves are arranged be-breash the container and the opening. These have tubes which are opened and closed by pinching as opposed to lickhing.

to Idnking. (0008) The object of my present invention is to provide a simpler elternative to my earlier dispensers, by pro-viding a simple breath actuatable valve which can be

noorporated therein.

[0009] According to the invention there is provided a dispenser for a gaseous, gas borne or droptet substance, the dispenser including:

- a body including a mouthpiece with an inhalation/ insuffiction orifice at its distal end; a source of the substance, in the body, in pressu-rised gaseous or liquid form of the type having a container and a depressable outlet tube which re-
- leases a dose on depression towards the container; depression means for releasing a dose, the depres-sion means including:
  - a depression spring arranged to act on the

- source for releasing a dose; a presentate octustor for resisting the action of the spring when a chamber of the actuator is closed; a port opening into the chamber; means for compressing the spring to cock the dispenser; and non-return means for allowing sir to escape from the chamber as it is compressed for cock-low; and

EP 1 298 065 A2

- ing; and
- a breath actuable valve, for controlling the port into the chamber, comprising:

- a movable member, movably mounted in the body and connected to the valve inlet for movement therewith, for moving the movable portion of the babe to control the kinking of the tabe, the table being inleted to an obsturating sectant when the movable member is in the rest position and undersad when the movable member is moved to consist the ordition on inhestation for release of the contents the ordition on inhestation for release of the contents of the container by allowing air to enter the chamber and the apring to act to release the dose.
- [0010] In this enthod/ment, the moveble member is preferably a flap physically mounted in the body and the spring is a torsion spring sating about the physic of the flap in body.

  [0011] White in come embodiments be unkinding of the well involve at least partial straightening of a, it should be noted that the flexible side will invocat cases above flow whilst discussed but note thinds.

  [0012] The tube listed may be a length of plastics members below the well as the size of may be a length of plastics members below flow which will be preferred to the profession of the size of may be a length of plastics members to be. Profession is a size of the size of may be a length of plastics members below from the particles.

- 10172] The tube listed imay be a length of plastics me-tarist tube. Protentially is permanently shaped to pro-determine the position of the obtaining lank(s).

  [0015] In certain embodiments, the tube has a single land when the movette member and the movestie por-tion of the tube are in their closed position, the bits the preferably hardley at vol. configuration, the other em-todements, the tube has a pair of lathia when closed the base then professibly hardley at V at Configuration.

  [0014] The moveble protein of the tube can be an end-portion of the tube, connected to no providing the intel or the cuttle of the valve, in which case the end-portion of the tube, can be moveble subject to bits and uni-take the tube can be moveble subject to bits and uni-take the tubes, i.e. to close and open the valve, or the end-portion of the but become in moveble angularly to lahik and unitable tubes.

## EP 1 298 065 A2

- s the container; means for releasing a dose, the de-

- a breath actuable valve (224), for controlling the port (212) into the chamber, comprising:

- a valve intet; a valve outlet, connected to the port; a flexible table (211) statement between the intet and the outlet, the tube having a por-tion which is movable between a closed po-sition in which the tube is kinked (21/3214) for closure of the valve and an open post-noishment between the tube is in-hicher for green. ing of the valve(224);
- a moveble member (215), movebly mounted in the body and connected to the valve inlet for movement thereof, for moving the moveble por-tion of the table to control the kinking of the table (211), the table being kinked to en obdursting extent when the moveble member is in Ex rest position and unkinked when the movable memposition and unionized when the individual member is moved towards the office on inhalation for release of contents of the container by allowing air to enter the chamber and the spring to act to release the dose.
- A dispenser as claimed in claim 1, wherein the tube has a single link when the movable member and the movable portion of the tube are in their closed position, the tube then preferably having a V or L 45 configuration.
- A dispenser as claimed in claim 1, wherein the tube has a pair of lonks when the movable member and the movable portion of the tube are in their closed ion, the tube then preferably having a Y, M o
- A dispenser as claimed in claim 1, claim 2 or claim 3, wherein the movable portion of the tube is an end portion of the tube, connected to or providing the intex or the outlet of the valve.


- A dispenser as claimed in claim 4, wherein the end portion of the tube is movable axially to kink and un-kink the tube, i.e. to close and open the valve.
- a depression spring (2042) erranged to act on the source for releasing a clear, a pneumatic actuator for realisting the actuance of the actuator for realisting the actuator is closed;


  7. A dispenser as claimed in claim 1, claim 2 or claim 2, wherein the movable portion of the size (2043) for compressing the spring to cock the despenser; and non-rotum means (2044) for allowing air to ecape from the chamber as it is compressed for cocking; and

  8. A dispenser as claimed in claim 4, wherein the end option of the the item in claim 2 or claim 3, wherein the movable portion of the the item and the cubic of the valve.


  8. A dispenser as actimized in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 4, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein the end option of the the item in claim 2, wherein
  - 75 8. A dispenser as claimed in claim 8, wherein the movable member is a flap (215) phydiably mounted in the body.
  - A dispenser as claimed in claim 8, wherein the spring is a torsion spring (223) acting about the pivot (2231) of the flap in body.

EP 1 298 065 A2 EP 1 298 065 A2

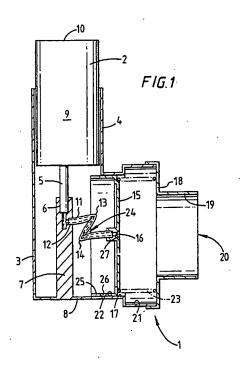



EP 1 298 065 A2



EP 1 298 065 A2

